




# SWIVEL CRIMPNOLOGY™ NIPPLES

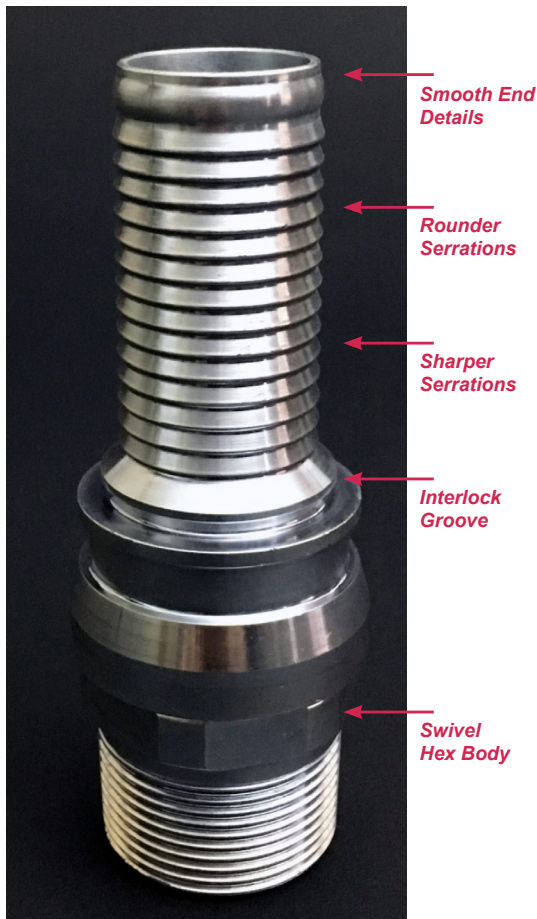

## Features & Benefits

- 360° swivel rotation between the threaded hex and hose barb for easy installation, eliminates hose kinking.
- Swivel is not for continuous rotation applications.
- Designed for use with Campbell Interlocking Ferrules.
  - 3/4" and 1" use standard ferrules and meet standard Crimpnology nipple performance ratings.
  - 1-1/4" thru 2" use long ferrules and are rated at 500 psi @ 70°F.
- Threaded body includes hex wrench-flats.
- Viton O-Ring and snap ring inside hex area
- Interlock groove on fitting locks ferrule into place for ultimate holding power.
- Graduated serration pattern (sharper near the interlock, rounder near the end, with smooth end detail to reduce potential failure caused by abrasion) grips, seals, and protects hose.
- Shank and ferrule lengths are matched for performance and to avoid potential hose tube or cover damage.

## Recommended Hose Attachment

- Interlocking ferrules

## Recommended Use

- Multi-purpose fluid, chemical, bulk handling

Hose System Components			MAX. SYSTEM WORKING PRESSURE (PSI @ 70°F) *				
			Hose Size				
Fitting/Coupling	Attachment	Hose Type	3/4	1	1-1/4	1-1/2	2
Crimpology Nipple Swivel	Ferrule	Chem/Rubber	500	500	-	-	-
Long Crimpology Nipple Swivel	Long Ferrule	Chem/Rubber	-	-	500	500	500

\* See footnotes 1, 2 and 4 on Page 1 of the Campbell Fittings Catalog.