





TOUGH FITTINGS FOR BIG AIR

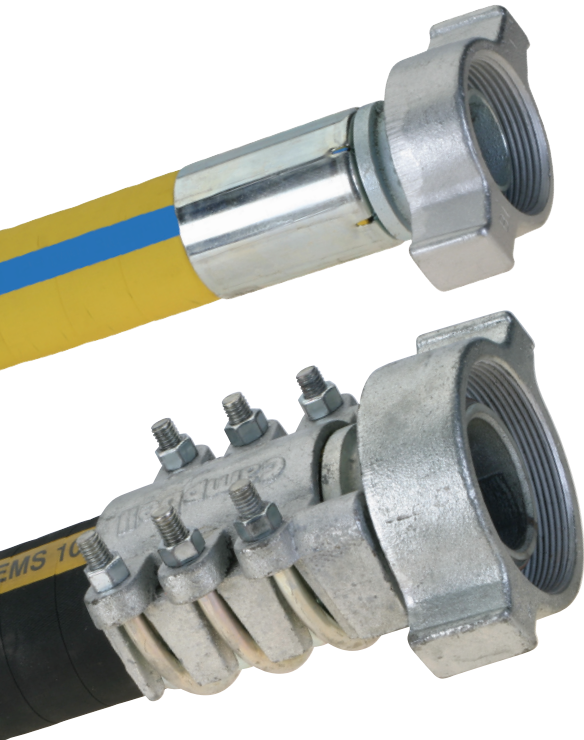

Campbell Viton Seal Ground Joint Couplings Improve Safety and Save Energy


- Coupling combines metal-to-metal mating area with a Viton o-ring as a secondary seal, saving thousands of dollars in operating costs caused by leaky couplings.
- Viton o-ring allows coupling to be hand-tightened for no-leak operation!
- Campbell Viton Seal Ground Joint Couplings are interchangeable with other ground joint-style couplings.




Never hammer ground joint couplings again!

Campbell Crimpnology™

- Campbell Crimpnology ensures that all our couplings and ferrules are designed as an integrated system to provide repeatable, measurable performance.
- There are no bolts to re-tighten, to snag equipment, or injure workers.

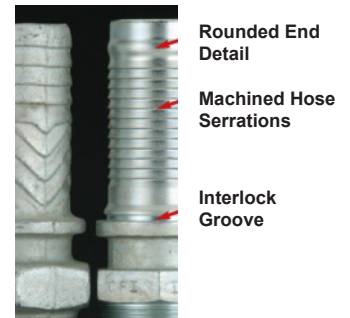

Conventional vs Campbell

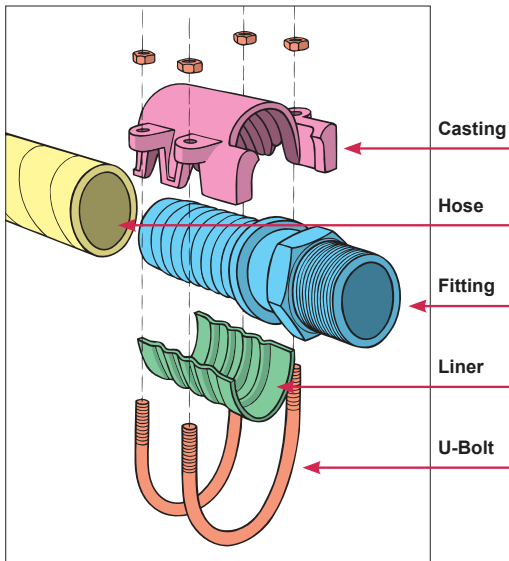

If you need a clamp, Campbell U-Bolt Clamps are superior to old “clam shell” style bolt clamps.

- Perfect for field repair.
- 360° U-Bolt Clamps completely wrap around the hose and fitting, not squash from top and bottom.
- “Safety fingers” designed on the clamp casting interlock with a “color” on the coupling for safe, secure hose retention.
- Bolts are all on one side for easier installation and re-tightening.

Hose System Components			MAX. SYSTEM WORKING PRESSURE (PSI @ 70°F)						
			Hose Size						
Fitting/Coupling	Attachment	Hose Type	1-1/2	2	2-1/2	3	4	5	
Viton® Ground Joint/Air Hammer/Male Stem	U-Bolt Clamp	Steam	1250	1250	800	500	500	300	
Viton® Ground Joint/Air Hammer/Male Stem	Long Ferrule	Rubber	1000	1000	650	500	500	-	

